

Non-Newtonian Flow with Heat and Mass Transfer Over a Porous Stretching Sheet Under the Effects of Space Dependent and TGD Heat Sink, Non-Uniform Heat Source and Dissipation of Energy and CGD Mass Diffusion with Suction/Blowing

S Priyanka¹, J Phakirappa², P H Veena^{3*}

¹Department of Mathematics, Regional Research Center, Visvesvaraya Technological University, Belagavi-590 018, Karnataka, India.

²Department of Mathematics, Rao Bahadur Y. Mahabaleswarappa Engineering College, Ballari-583 104, Karnataka, India and affiliated to Visvesvaraya Technological University, Belagavi-590 018, Karnataka, India.

^{3*}Department of Mathematics, Smt. V G Degree College for Women, Kalaburagi-585 102, Karnataka, India and affiliated to Karnataka State Akkamahadevi Women's University, Vijayapur-586108, Karnataka, India and Visvesvaraya Technological University, Belagavi-590 018, Karnataka, India.

Abstract: In the present paper, an analytical study of visco - elastic fluid flow with heat and mass transfer characteristics over a porous stretching sheet has been examined. Heat balance is maintained with space dependent and temperature gradient dependent heat sink/source, viscous dissipation, and non-uniform heat source on the non-Newtonian Walter's liquid B' model. The mass balance is maintained with chemically reactive species of order I, variable mass diffusivity and concentration gradient dependent mass diffusion. Using similarity transformation technique on the highly non-linear differential equations, several closed form analytical solutions are obtained for non-dimensional temperature and concentration in both PST and PHF cases in the form of confluent hypergeometric (Kummer's) functions. The effect of permeability parameter, viscoelastic parameter, suction parameter on velocity profiles and various physical fluid situations with different degrees of viscoelasticity, Prandtl number, Eckert number, heat source- sink strength, temperature field are discussed in detail and presented through graphs. Similarly in the mass transfer field the effects of Schmidt number, reaction rate parameters are discussed in detail and presented through graphs.

Keywords: Concentration Gradient Dependent (CGD); Flow and Heat transfer; non-Newtonian flow; porous medium; Stretching sheet; Temperature Gradient Dependent (TGD); Visco- elastic fluid.

1. Introduction

Many practical applications, such as food stuff, polymer, molten plastic, blood, fluids are non-Newtonian in their flow characteristics. Boundary layer flow over a continuous moving/stretching surface is an important type of flow occurring in a number of engineering processes. Cooling of a metallic plate in a cooling bath, Aerodynamic extrusion of plastic and rubber sheets, which may be an electrolyte, crystal glowing, the boundary layer along a liquid film in condensation process and filament or polymer sheet extruded continuously from a dye. Various aspects of this problem have been investigated by Sakiadis [1-3]. Erickson et al. [4] studied the temperature distribution in the boundary layer flow with suction or blowing and relevant experimental results were studied by Tsou et.al. [5] including many aspects for the flow and heat transfer boundary layer flow problems past a continuous moving plate. Non-Newtonian fluid flow which are viscoelastic in nature past a stretching sheet was examined by Siddappa and Khapate [6]. Dutta and Gupta [7] have studied the analytical

solution for the velocity field and temperature distribution over the stretching sheet. Rajagopal et.al. [8] studied the same flow as in Ref [6] and obtained a similarity solution of the boundary layer equations numerically for the case of small visco-elastic parameter. In many practical applications there exists significant temperature difference between the surface and the ambient fluid. In this regard Vajravelu and Nayfeh [9] have studied the effect of temperature dependent heat source /sink in heat transfer characteristics.

The study of the temperature field with modified generation or absorption of heat in a moving fluid is important in view of many physical situations-such as (i) Problems concerned with dissociating fluids. (ii) Problems dealing with chemical reactions. The heat transfer in a visco -elastic fluid past a stretching sheet with viscous dissipation and internal heat generation have been studied by Veena et.al. [10] and the flow of visco elastic fluid obeying Walter's liquid B' model past a stretching sheet with and without suction have been analysed by Abel [11,12] and also attempted an exact solution of the boundary layer equation of motion. Similar solutions of laminar boundary layer equations describing the study of two-dimensional flow and heat transfer in an electrically conducting and heat generating fluid driven by a continuous moving porous surface immersed in a fluid saturated porous medium has been investigated Ali Chamkha [13]. A space dependent exponentially decaying heat generation or absorption is considered on flow and heat transfer past a vertical plate by [14-15]. The effect of suction and blowing on the heat transfer problem in the presence of the porous media is reported by a smaller number of researchers. The conjugate heat transfer problem from an accelerating surface in presence of uniform suction and blowing in a viscous fluid has been solved by Dutta [16]. Chen and Char [17] made an analysis about the effects of PST (prescribed surface temperature) and PHF (Prescribed wall heat flux) boundary conditions on the heat transfer characteristics of a continuous linearly stretching sheet subjected to suction or blowing. The heat and mass transfer in a visco- elastic fluid flow over an accelerating with heat source and viscous dissipation for both the PST and PHF cases has been done by Sonth *et.al.* [18]. K.Rajagopalet.al.[19] were studied the diffusion of chemically reactive species of an electrically conducting visco elastic fluid immersed in a porous medium over a stretching sheet with PST and PHF cases. Manjunatha Gudekoteet et.al. [20] examined how convective and porous conditions affected the peristaltic transport of non-Newtonian fluid through an irregular channel with wall properties. Manjunatha Gudekote et.al.[21] research on the "Slip Effects on Peristaltic Transport of Casson Fluid in an Inclined Elastic Tube with Porous Walls". Divya Baliga et.al.[22] study looked into the impact of velocity and thermal slip on the peristaltic transport of a Herschel-Bulkley fluid via an inclined porous tube.

Motivated by all the above analyses in the present paper, an analytical study of visco - elastic fluid flow with heat and mass transfer characteristics for prescribed surface temperature boundary conditions (PST) and prescribed wall flux (PHF) in heat transfer and Prescribed power law surface concentration (PST) in mass transfer over a porous stretching sheet have been studied.

2. Formulation of the problem

Study of two-dimensional boundary layer flow of an incompressible visco elastic fluid flow of the type Walter's liquid B' model over a stretching surface is considered for investigation. The flow is generated due to the stretching of the sheet by applying two equal and opposite forces along the x-axis and keeping the origin fixed. The flow is assumed to be confined in a region $y > 0$. It is also studied that the fluid considered for analysis is of non-Newtonian type. The basic boundary layer equations are

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (1)$$

$$u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} = \nu \frac{\partial^2 u}{\partial y^2} - k_0 \left\{ u \frac{\partial^3 u}{\partial x \partial y^2} + v \frac{\partial^3 u}{\partial y^3} - \frac{\partial u}{\partial x} \frac{\partial^2 u}{\partial x \partial y} + \frac{\partial^2 u}{\partial y^2} \frac{\partial u}{\partial x} \right\} - \frac{\nu}{k} u \quad (2)$$

$$\rho c_p \left(u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} \right) = k \frac{\partial^2 T}{\partial y^2} + q_{\eta\eta\eta} + Q(T - T_{\infty}) + \mu \left(\frac{\partial u}{\partial y} \right)^2 + Q' \frac{\partial T}{\partial y} + \rho k_0 \frac{\partial u}{\partial y} \left(u \frac{\partial u}{\partial x} + \frac{\partial u}{\partial y} \right) \quad (3)$$

$$u \frac{\partial c}{\partial x} + v \frac{\partial c}{\partial y} = D \frac{\partial^2 c}{\partial y^2} + k_r (C - C_{\infty}) + D \frac{\partial c}{\partial y} \quad (4)$$

Where u and v are the flow velocities in x and y directions respectively. k_0 is the coefficient of elasticity, ν is the kinematic viscosity and k' denotes permeability, $q_{\eta\eta\eta}$ is the space dependent internal heat generation /absorption or rate of internal heat generation, ρ is the fluid density, c_p is the specific heat at constant pressure, μ is the dynamic viscosity, Q' is the volumetric rate of heat absorption, k_r denotes reaction rate coefficient, k is the thermal conductivity, Q is the specific internal heat generation or absorption and D is mass diffusion coefficient.

The term $q_{\eta\eta\eta}$ is modelled as

$$q_{\eta\eta\eta} = \frac{k u_w(x)}{x\nu} (A^*(T_w - T_\infty)e^{-\alpha\eta} + B^*(T - T_\infty))$$

Where T_w is the temperature at the wall, T_∞ is the fluid temperature far away from the surface, k is the thermal conductivity and A^* and B^* are the parameters of space dependent and temperature-dependent internal heat generation (i.e., $A^* > 0$ and $B^* > 0$)/absorption (i.e., $A^* < 0$ and $B^* < 0$), respectively.

The appropriate boundary conditions on velocity field take the form

$$\begin{aligned} u &= cx, & v &= v_w & \text{at} & y=0 \\ u &= 0, & u_y &\rightarrow 0 & \text{as} & y \rightarrow \infty \end{aligned} \quad (5)$$

Here suffix y represents differentiation w.r.t. y , c is the constant known as stretching rate and v_w is the suction velocity across the stretching sheet when $v_w < 0$ and it is blowing velocity $v_w > 0$

3. Solution of the Momentum Equation

To solve momentum Eq. (2), defining the new velocity variables as follows

$$u = cx f_\eta(\eta), \quad v = -\sqrt{cv} f(\eta), \quad \eta = \sqrt{\frac{c}{\nu}} y \quad (6)$$

Where f is the dimensionless stream function and η is the similarity variable. Substitution of Eq. (6) in Eq. (2) results in a fourth order non-linear differential equation in non-dimensional form

$$f_\eta^2 - ff_{\eta\eta} = f_{\eta\eta\eta} k_1 \{ 2f_\eta f_{\eta\eta\eta} - ff_{\eta\eta\eta\eta} - f_{\eta\eta}^2 \} - k_2 f_\eta \quad (7)$$

Where,

$$k_1 = \frac{k_0 c}{\nu} - \text{is the visco-elastic parameter}$$

$$k_2 = \frac{\nu}{k' c} - \text{is the permeability parameter}$$

The corresponding boundary conditions on f take the form

$$\begin{aligned} f &= -\frac{\nu w}{\sqrt{cv}}, & f_\eta(0) &= 1 & \text{at} & \eta = 0 \\ f_\eta(\eta) &= 0, & f_{\eta\eta}(\eta) &= 0 & \text{as} & \eta \rightarrow \infty \end{aligned} \quad (8)$$

Now exact solution of Eq. (7) with Boundary conditions Eq. (8) is of the form

$$f(\eta) = a - \left(\frac{1}{b}\right) e^{-\alpha\eta} \quad (9)$$

Where,

$$a = \frac{1}{2(1+k_2)} \left[R(1+2k_2) + \sqrt{R^2 + 4(1+k_2)} \right]$$

$$b = \frac{1}{2} \left(R + \sqrt{R^2 + 4(1 + k_2)} \right) \quad (10)$$

$$\alpha = \sqrt{\frac{(1+k_2)}{(1-k_1)}}$$

$$R = \frac{v_w}{\sqrt{c_v}} \quad - \quad \text{is a suction parameter.}$$

Where α is a real positive root of the following cubic equation and solved by Graffe's root square method.

$$\alpha^3 - \frac{1}{k_{1a}} \alpha^2 + \frac{1}{k_1} \alpha + \frac{k_2}{k_{1a}} = 0 \quad (11)$$

4. Heat Transfer Analysis

4.1 PST Case (Prescribed Surface Temperature)

Solution of the heat transfer Eq. (3) depends on the nature of the prescribed boundary conditions.

The appropriate boundary conditions on temperature are defined in PST case as

$$\begin{aligned} T_w &= T_\infty + A_1 \left(\frac{x}{l} \right)^2 & \text{at} & \quad y \rightarrow 0 \\ T &\rightarrow T_\infty & \text{as} & \quad y \rightarrow \infty \end{aligned} \quad (12)$$

Where A_1 is a constant whose value depends on the properties of the fluid and l is the characteristic length.

And defining the non-dimensional temperature variable $\theta(\eta)$ as

$$\theta(\eta) = \frac{T - T_\infty}{T_w - T_\infty} \quad (13)$$

To obtain similarity solutions for temperature $\theta(\eta)$, stretched boundary surface with prescribed power law temperature of second degree is considered. Using transformation Eq. (6) and Eq. (13), heat Eq. (3) becomes,

$$\begin{aligned} \theta_{\eta\eta} + (\text{Pr}f(\eta)\theta_\eta + Q^*)\theta_\eta - \text{Pr} \left[2f_\eta(\eta) - \frac{B^*}{\text{Pr}} - \frac{\beta}{\text{Pr}} \right] \theta(\eta) = \\ -A^*e^{-\alpha\eta} - E_c f_{\eta\eta}^2(\eta) - E_c^* [f_\eta^2(\eta)f_{\eta\eta}^2(\eta) - f(\eta)f_{\eta\eta}^2(\eta)] \end{aligned} \quad (14)$$

Where,

$$\text{Pr} = \frac{\rho c_p v}{k} \quad - \quad \text{is the Prandtl number}$$

$$\beta = \frac{v}{k_c} Q \quad - \quad \text{is the Source /Sink parameter}$$

$$E_c = \frac{\mu c^2 v l^2}{k A_1} \quad - \quad \text{is the Eckert number}$$

$$E_c^* = \frac{\rho k_0}{k A_1} c^2 \sqrt{\frac{c}{v}} l^2 v \quad - \quad \text{is the modified Eckert number}$$

$$Q^* = \frac{v}{k_c} \sqrt{\frac{c}{v}} Q \quad - \quad \text{Non-dimensional constant heat source}$$

And the corresponding boundary conditions Eq. (12) transform to dimensionless

$$\theta(0) = 1, \quad \theta(\infty) = 0 \quad (15)$$

Defining the change of variable

$$\xi = -\frac{Pr}{\alpha^2} e^{-\alpha\eta} \quad (16)$$

And making use of the Eq. (9), Eq. (10) and Eq. (16) in Eq. (14), the governing non dimensional form of energy equation is obtained in terms of ξ as follows

$$\xi \theta_{\xi\xi} + [1 - (p_0 - Q^{**}) - \xi] \theta_{\xi} + \left[2 + \frac{1}{\xi \alpha^2} (B^* + \beta) \right] \theta = \frac{A^*}{Pr} - (E_c + E_c^*) \frac{\alpha^6}{Pr^2 b^2} \xi \quad (17)$$

Where,

$$p_0 = \frac{Pr}{\alpha^2}$$

$$Q^{**} = \frac{Q^*}{\alpha^2} \quad \text{Modified Non-dimensional constant heat source}$$

The corresponding boundary conditions Eq. (15) convert to

$$\theta\left(-\frac{Pr}{\alpha^2}\right) = 1, \quad \theta(0) = 0 \quad (18)$$

The solution of the Eq. (17) subject to the boundary conditions in Eq. (18) is obtained in the following form of confluent hypergeometric functions of the similarity variable η as

$$\theta(\eta) = \left[1 - C_1 \frac{Pr^2}{\alpha^2} \right] (e^{-\alpha\eta})^{\frac{p_0+q_0}{2}} \frac{M\left[\frac{p_0+q_0-4}{2}, 1+q_0, -\frac{Pr^2}{\alpha^2} e^{-\alpha\eta}\right]}{M\left[\frac{p_0+q_0-4}{2}, 1+q_0, -\frac{Pr^2}{\alpha^2}\right]} - C_1 \left[-\frac{Pr}{\alpha^2} e^{-\alpha\eta} \right]^2 \quad (19)$$

Where,

$$C_1 = \frac{\frac{-A^*}{Pr\xi} - \frac{(E_c + E_c^*)}{Pr^2 b^2} a \alpha^6}{4 - 2p_0 + \frac{1}{\alpha^2} (B^* + \beta)}$$

$$\text{And} \quad q_0 = \sqrt{(p_0 + Q^*) - 4 \frac{(B^* + \beta)}{\alpha^2}} \quad (20)$$

Further Dimensionless wall temperature gradient $\theta_{\eta}(0)$ is derived and obtained as

$$\theta_{\eta}(0) = A_0 \left\{ \frac{Pr}{2\alpha} \left[\frac{p_0+q_0-4}{1+q_0} \right] M\left[\frac{p_0+q_0-2}{2}, 2+q_0, -\frac{Pr}{\alpha^2}\right] - \alpha \left(\frac{p_0+q_0}{2} \right) M\left[\frac{p_0+q_0-4}{2}, 1+q_0, -\frac{Pr}{\alpha^2}\right] - C_1 - Pr \alpha^2 \right\} \quad (21)$$

Where,

$$A_0 = \frac{\left(1 - C_1 \frac{Pr^2}{\alpha^2} \right)}{\left(\frac{p_0+q_0-4}{2}, 1+q_0, -\frac{Pr}{\alpha^2} \right)}$$

Taking into account the thermal radiation and temperature gradient dependent heat sink, the local heat flux is defined and expressed as follows

$$q_w = -k \left(\frac{\partial T}{\partial y} \right)_w = k \sqrt{\frac{c}{v}} (T_w - T_{\infty}) \left(-\theta_{\eta}(0) \right) \quad (22)$$

4.2 PHF Case (Prescribed Wall Flux)

In PHF case, solution of the heat transfer Eq. (3) depend on the nature of the prescribed Power law heat flux boundary conditions which are defined as

$$-k \left(\frac{\partial T}{\partial y} \right) = q_w = E \left(\frac{x}{l} \right)^2 \quad \text{at} \quad y = 0 \quad (23)$$

$$T \rightarrow T_\infty \quad \text{as} \quad y \rightarrow \infty \quad (24)$$

Where E is constant

Defining a new variable as

$$g(\eta) = \frac{T - T_\infty}{\frac{E}{k} \sqrt{\frac{v}{c}} \left(\frac{x}{l} \right)^2} \quad (25)$$

and using the Eq. (6), Eq. (9) and Eq. (13) in Eq. (3) it deduces to the following non dimensional boundary layer equation as

$$g_{\eta\eta} + (\text{Pr}f(\eta) + Q^{**})g_\eta(\eta) - \text{Pr} \left[2f_\eta(\eta) - \frac{B^*}{\text{Pr}} - \frac{\beta}{\text{Pr}} \right] g(\eta) = -A^* e^{-\alpha\eta} - E_c f_{\eta\eta}^2(\eta) - E_c [f_\eta^2(\eta) f_{\eta\eta}^2(\eta) - f(\eta) f_{\eta\eta}^2(\eta)] \quad (26)$$

And the corresponding boundary conditions transform to

$$g_\eta(0) = -1, \quad g(\infty) = 0 \quad (27)$$

Following the same solution methodology as done in PST case for PHF case also. The solution of Eq. (26) is obtained as follows

$$g(\eta) = \left(\frac{-\text{pr}}{\alpha^2} \right)^{\frac{p_0+q_0}{2}} \left[(e^{-\alpha\eta})^{\frac{p_0+q_0}{2}} \left[\frac{p_0+q_0-4}{2(1+q_0)} \right] M \left(\frac{p_0+q_0-4}{2}, 1+q_0, \frac{-\text{pr}}{\alpha^2} e^{-\alpha\eta} \right) \right] + C_1^* \left(\frac{-\text{pr}}{\alpha^2} e^{-\alpha\eta} \right)^2 \quad (28)$$

Where,

$$C_1^* = \frac{\alpha(1+C_2)}{2(-\text{pr})^2} \quad (29)$$

$$C_2 = \left(\frac{-\text{pr}}{\alpha^2} \right)^{\frac{p_0+q_0}{2}} \left\{ \frac{p_0+q_0-4}{2(1+q_0)} M \left(\frac{p_0+q_0-2}{2}, 2+q_0, \frac{-\text{pr}}{\alpha^2} \right) \left(\frac{-\text{pr}}{\alpha} \right) - \alpha p_0 + q_0 2 M p_0 + q_0 - 4 2, 1 + q_0, -\text{pr} \alpha^2 \right\} \quad (30)$$

And the temperature at sheet is given by

$$T_w = T_\infty + \frac{E x^2}{k} \sqrt{\frac{v}{c}} g(0) \quad (31)$$

Where the dimensionless wall temperature is

$$g(0) = \left(\frac{-pr}{\alpha^2}\right)^{\frac{p_0+q_0}{2}} \left[\frac{p_0+q_0-4}{2(1+q_0)} \right] M \left(\frac{p_0+q_0-4}{2}, 1+q_0, \frac{-pr}{\alpha^2} \right) + C_1^* \left(\frac{-pr}{\alpha^2}\right)^2 \quad (32)$$

5. Mass Transfer Analysis

5.1 Solution Methodology

Solution of the mass transfer Eq. (4) depend on the nature of the prescribed boundary conditions

The appropriate boundary conditions on concentration are considered as

$$C = C_w = C_\infty + A_2 \left(\frac{x}{l}\right)^2 \quad \text{at} \quad y = 0$$

$$C \rightarrow C_\infty \quad \text{as} \quad y \rightarrow \infty \quad (33)$$

Where, C_w denotes the concentration at the wall and C_∞ denotes the concentration far away from the wall. A_2 is constant whose values depends on the properties of the fluid and l is the characteristic length.

And defining the non-dimensional concentration variable as

$$\varphi(\eta) = \frac{C-C_\infty}{C_w-C_\infty} \quad (34)$$

To obtain the similarity solutions for concentration $\varphi(\eta)$, we considered stretched boundary surface with prescribed power law concentration of second degree only. Using second transformation Eq. (6) and Eq. (34), Eq. (4) becomes

$$\varphi_{\eta\eta}(\eta) + (Sc f(\eta) + M^*)\varphi_\eta(\eta) - 2Scf_\eta(\eta)\varphi(\eta) = \beta^* Sc\varphi(\eta) \quad (35)$$

Where,

$$Sc = \frac{\nu}{D} \quad - \quad \text{Schmidt number}$$

$$M^* = \frac{\nu}{c} \sqrt{\frac{c}{\nu}} \quad - \quad \text{Non dimensional constant mass source}$$

$$\beta^* = \frac{k_r}{c} \quad - \quad \text{reaction rate parameter}$$

Using Eq. (34) in Eq. (33), we get the boundary conditions in dimensionless form as

$$\varphi(0) = 1, \quad \varphi(\infty) = 0 \quad (36)$$

and f is given in Eq. (9)

Clearly the concentration field φ is coupled to the velocity field through the dimensionless stream function f in the non-linear concentration Eq. (35).

In the special case of non-reacting species ($\beta^* = 0$) the non-linear term on the right-hand side of Eq. (35) vanishes and present concentration boundary layer equation becomes

$$\varphi_{\eta\eta}(\eta) + (Sc f(\eta) + M^*)\varphi_\eta(\eta) - 2Scf_\eta(\eta)\varphi(\eta) = 0 \quad (37)$$

And the corresponding boundary conditions are

$$\varphi(0) = 1, \quad \varphi(\infty) = 0 \quad (38)$$

defining the change of variable

$$\xi = -\frac{Sc}{\alpha^2} e^{-\alpha\eta} \quad (39)$$

and making use of the Eq. (9), Eq. (10) and Eq. (39) in Eq. (37), We obtained the governing non dimensional form of concentration equation in terms of ξ as follows

$$\xi\varphi_{\xi\xi} + (1 - C_0 - \xi)\varphi_{\xi}(\xi) + \frac{2\alpha}{b}\varphi(\xi) = 0 \quad (40)$$

where,

$$C_0 = \frac{Sc}{\alpha^2} ab - \frac{M^*}{\alpha^2} bv$$

and the corresponding boundary conditions are

$$\varphi\left(-\frac{Sc}{\alpha^2}\right) = -1, \quad \varphi(0) = 0 \quad (41)$$

The solution of the Eq. (40) subjected to the boundary conditions Eq. (41) is obtained in the following form of similarity variable η as

$$\varphi(\eta) = c\left(-\frac{Sc}{\alpha^2} e^{-\alpha\eta}\right)^{c_0} M(s^* - c_0, 1 + c_0, \xi) \quad (42)$$

where,

$$c = \left[c\left(-\frac{Sc}{\alpha^2} e^{-\alpha\eta}\right)^{c_0} M\left(s^* - c_0, 1 + c_0, -\frac{Sc}{\alpha^2}\right)\right]^{-1} \quad (43)$$

Further dimensionless wall concentration gradient $\varphi_{\eta}(0)$ is derived and obtained as

$$\begin{aligned} \varphi_{\eta}(0) = & c\left(-\frac{Sc}{\alpha^2}\right)^{c_0} \left[\frac{Sc}{\alpha} \left(\frac{s^* - c_0}{1 + c_0}\right) M\left(s^* - c_0 + 1, 2 + c_0, -\frac{Sc}{\alpha^2}\right) + \right. \\ & \left. 1, 2 + c_0, -Sc\alpha^2 \right] \alpha c_0 \left(s^* - c_0 + \right. \end{aligned} \quad (44)$$

The mass transfer analysis would be carried out by analysing the terms of the local mass flux which defined as

$$m_w = -D\left(\frac{\partial c}{\partial y}\right)(C_w - C_{\infty})[-\varphi_{\eta}(0)] \quad (45)$$

6. Results and Discussion

In this investigation the visco-elastic fluid flow over a stretching sheet in a saturated porous medium is considered. the basic equations of momentum and heat transfer are highly non-linear and converted into a set of ordinary differential equations. The solution of governing energy equation is obtained in terms of confluent hyper geometric functions (Kummar's function). Thus, the solutions for the heat transfer problem with space dependent and temperature gradient dependent heat sink/source is presented. In order to derive the several

closed form analytical solutions. Also, the effect of permeability parameter, visco-elastic parameter, suction parameter on velocity profile and various physical fluid situations are discussed in detail and presented through graphically.

Figure 1(a) is the representation of $f_\eta(\eta)$ Vs η for different values of porosity parameter k_2 and for zero suction. From the figure it is noticed that the increasing values of k_2 and the suction parameter decrease the velocity distribution in the flow field. Figure 1(b) is the plot of velocity profile $f_\eta(\eta)$ Vs η for various values of visco elastic parameter k_1 . This figure physically implies that the rise in values of visco- elastic parameter k_1 decreases the velocity profile. Figure 1(c) is the representation of $f_\eta(\eta)$ Vs η for different values of porosity parameter k_2 and suction parameter v_w . From the figure it is noticed that decrease the velocity distribution in the flow field while increasing value of k_2 and v_w .

Figure 1(d) is the depict of velocity profile $f_\eta(\eta)$ Vs η for different values of suction/blowing parameter v_w and also k_2 . From the figure it is observed that an increasing values of v_w and k_2 is to decrease the velocity profile.

Figure 2(a) is the representation of the effect of time dependent parameter B^* on temperature profile $\theta(\eta)$ in PST case. The graph is physically implying that the increase of time-dependent parameter B^* results in the increase in temperature distribution for increasing values of visco-elastic parameter k_1 .

Figure 2(b) is the graph of temperature distribution $\theta(\eta)$ Vs η for various values of Eckert number E_c and suction parameter v_w in PST case. From the figure it is depicted that the effect of increasing values of E_c is to increase the temperature distribution for $v_w > 0$. Figure 2(c) is drawn to display the nature of temperature profile $\theta(\eta)$ Vs η . The effect of heat source/sink β and suction parameter v_w on $\theta(\eta)$ is shown in this figure. The graph is physically noticed that the decrease the temperature distribution for $v_w = -0.235$ while increasing values of heat source parameter β . Figure 2(d) is drawn to display the nature of temperature distribution $\theta(\eta)$ Vs η for different values of suction/blowing parameter v_w in PST case. This graph demonstrates that the temperature distribution decreases with increasing values of v_w . Figure 2(e) represents the graph of $\theta(\eta)$ Vs η for various values of v_w in PST case. From This graph noticed that temperature profile decreases with increasing the values of v_w . It is also noticed that due to the effect of v_w slight characteristics of dissipation and blowing exhibited on the graph in temperature distribution for $v_w = 0$ and $v_w = 0.235$

Figures 3(a)-3(d), the plots of temperature profile $g(\eta)$ Vs η for different sets of parameters are drawn in PHF case. From the figures it is noticed that the wall temperature is changed while changing the physical parameters like the visco- elastic parameter (k_1), Prandtl number (Pr), space dependent term (A^*) and temperature dependent term (B^*). Also, it is noticed that the wall temperature is not unity. From the figs (3b and 3c) it is clearly found that temperature of the sheet is highly increased for greater value of A^* and B^* (i.e., $A^* = 1$ and $B^* = 0.1$).

Figures 4(a) and 4(b) represents the graphs of the non-dimensional concentration profile $\Phi(\eta)$ Vs η for various values of Schmidt number Sc . The concentration profile in the flow filed decreases while increasing the value of Schmidt numbers Sc i.e. a decrease of molecular diffusivity D , it results in a decrease of the concentration boundary layer. Hence the concentration of the species is lower for larger values of Sc and larger for small values of Sc . And also, we notice that the effect of Suction parameter v_w ($v_w > 0$) effects that to reduce the concentration profile. Comparing both the Figures 4(a) and 4(b) it results that the concentration profile $g(\eta)$ increases in the presence of visco-elastic parameter k_1 .

Figures 4(c) and 4(d) represents the graphs of the dimensionless concentration profile $\Phi(\eta)$ Vs η for various values of β is to reduces the concentration boundary thickness and increases the mass transfer even though in the presence of porous medium. This is in agreement with the equivalent heat transfer problem for which numerical data of Veena and Abel [23] have been plotted in the figures

7. Graphs

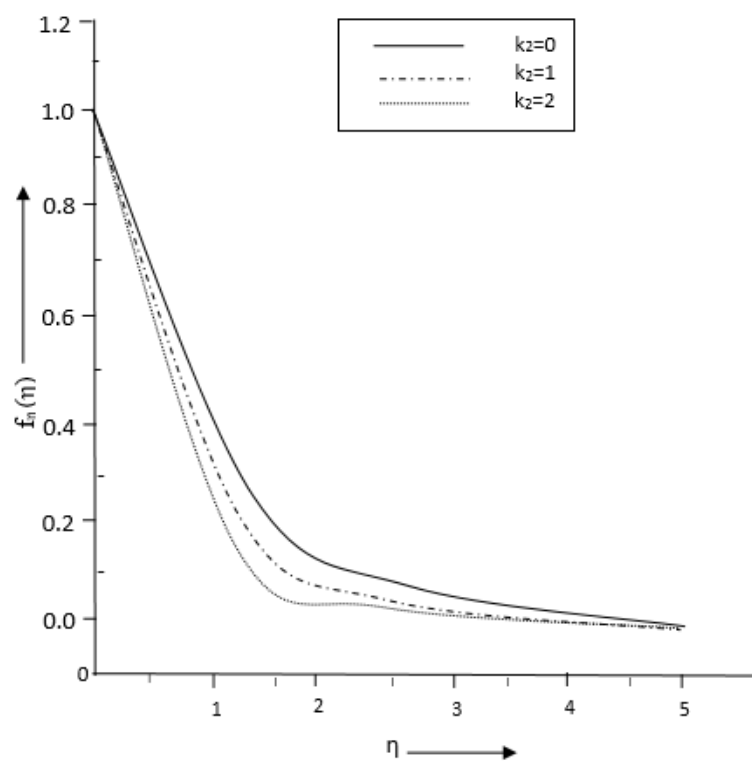


Fig. 1(a). The graph of velocity profile $f_{\eta}(\eta)$ Vs η for different values of $k_2 = 0, 1, 2$ with $v_w = 0$, $k_1 = 0.2$

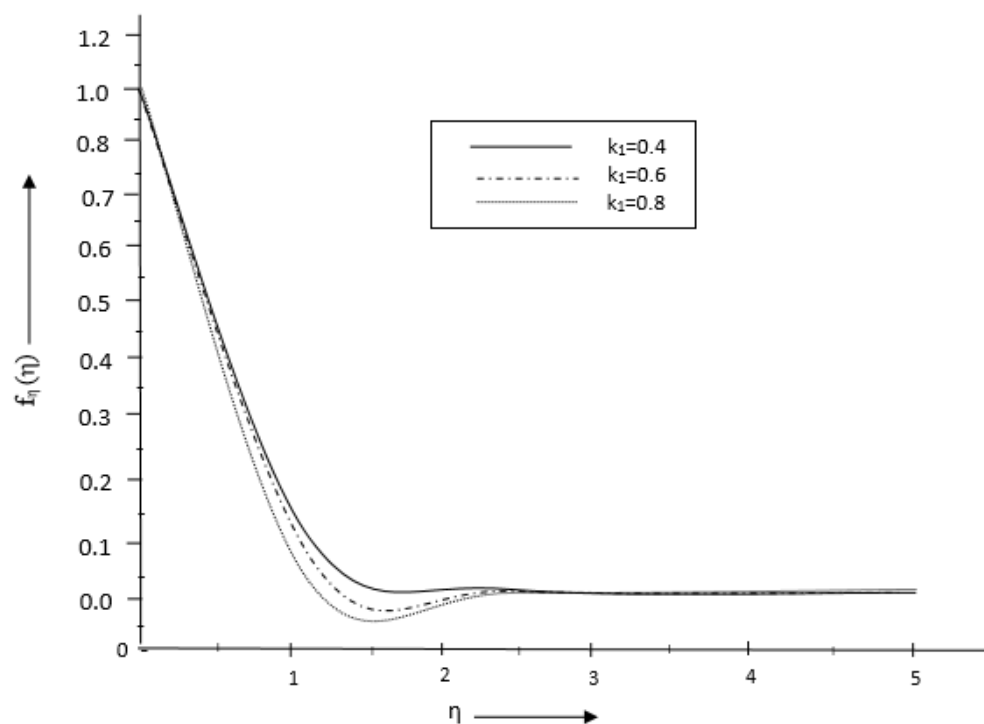


Fig. 1(b). The graph of velocity profile $f_{\eta}(\eta)$ Vs η for different values of $k_1 = 0.4, 0.6, 0.8$ with $k_2 = 1$, $v_w = 0$

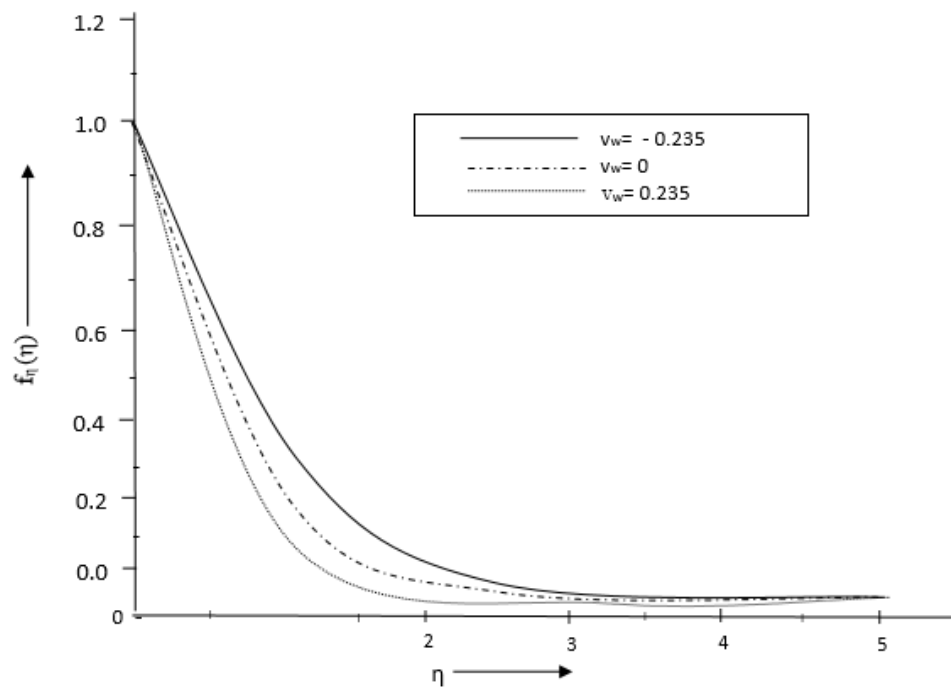


Fig. 1(c). The graph of velocity profile $f_{\eta}(\eta)$ Vs η for different values of $v_w = -0.235, 0, 0.235$ WITH $k_1 = 0.2, k_2 = 1.0$

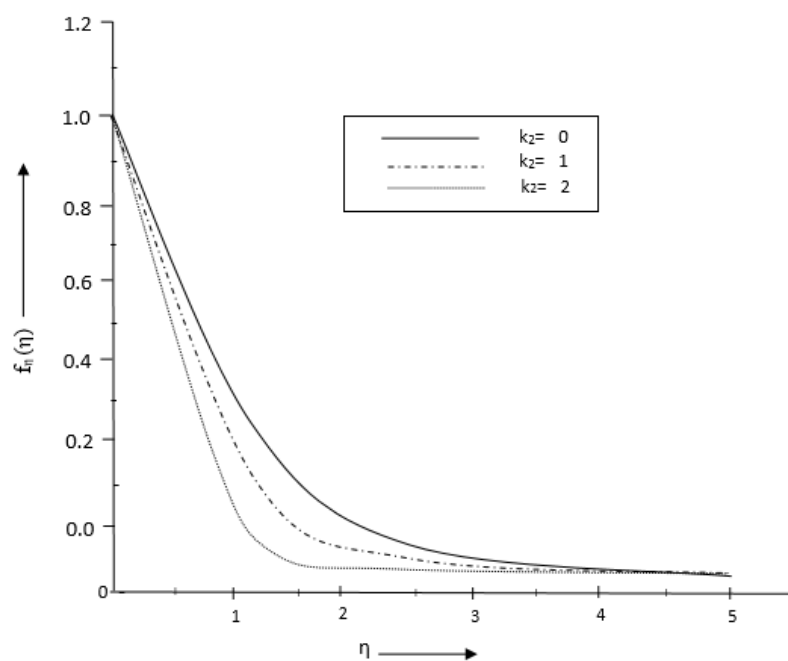


Fig 1(d). The graph of velocity profile $f_{\eta}(\eta)$ Vs η for different values of $k_2 = 0, 1, 2$ $v_w = -0.235, 0, 0.235$ with $k_1 = 0.2$

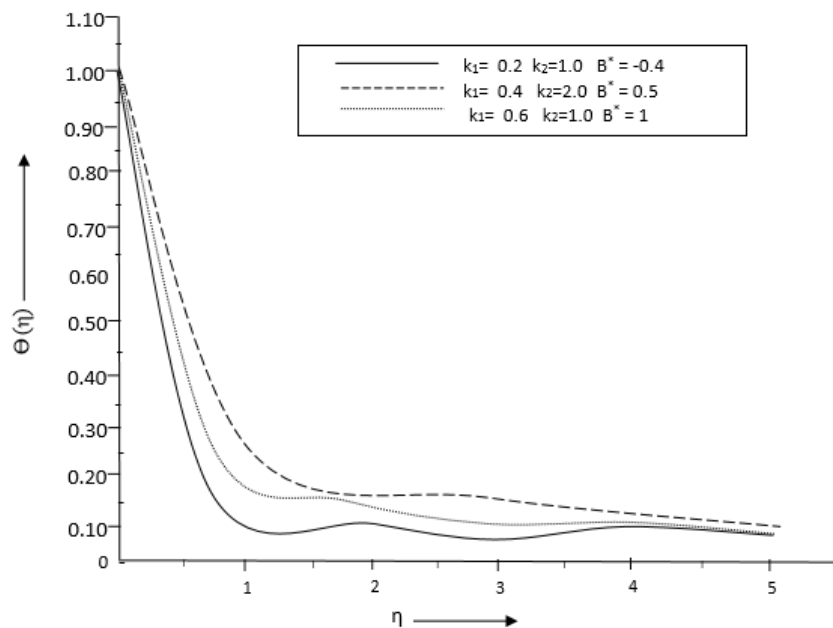


Fig 2(a). The graph of temperature profile $\Theta(\eta)$ Vs η for various values of k_1 , k_2 and B^* with $\beta=-0.1$, $E_c=0.2$ and $E_c^*=0.24$

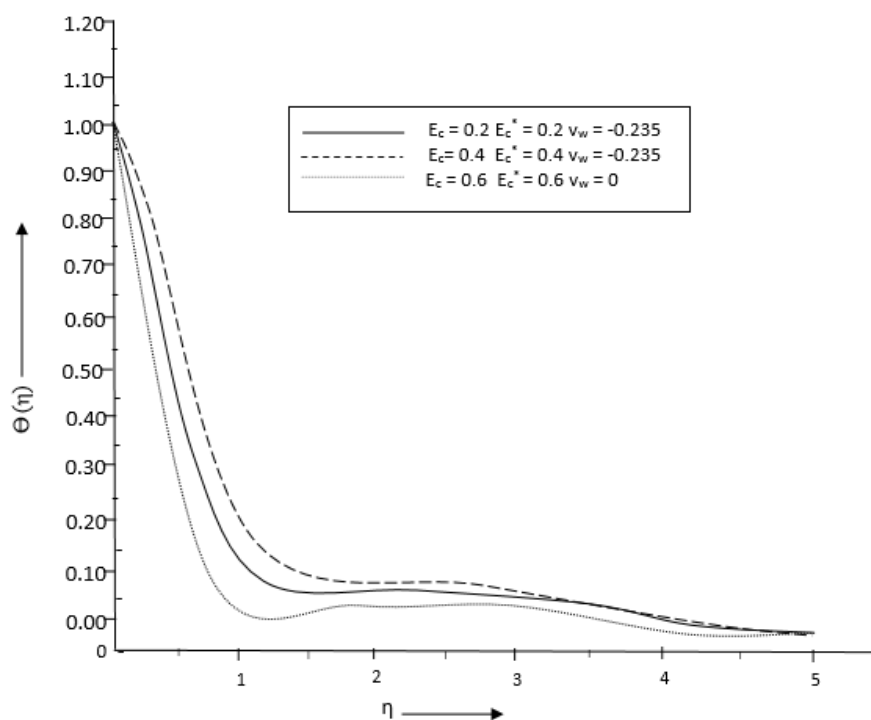


Fig. 2(b). The graph of temperature profile $\Theta(\eta)$ Vs η for various values of E_c , E_c^* and v_w with $\beta=-0.1$, $Pr=0.71$, $k_2=1.0$ and $k_1=0.1$

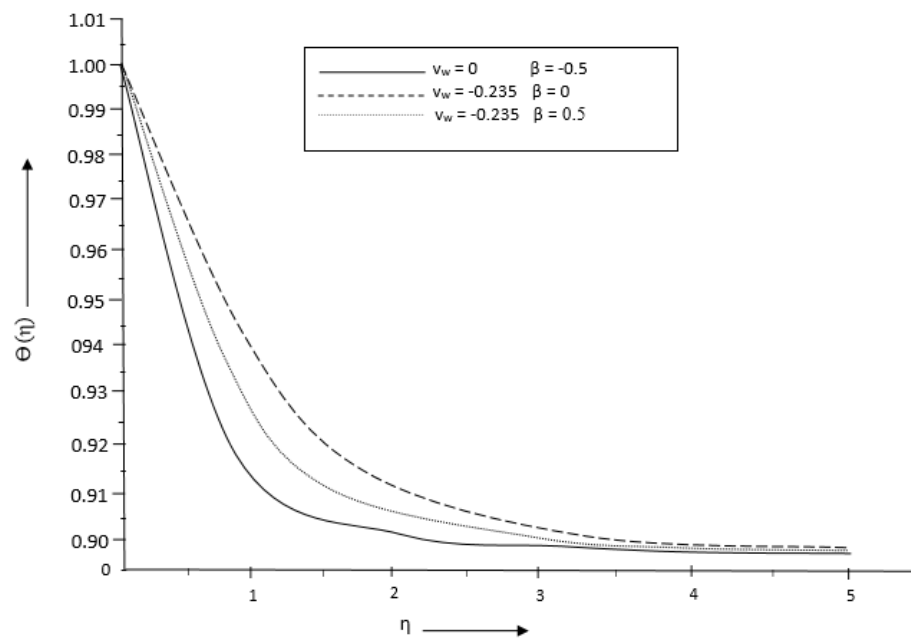


Fig. 2(c). The graph of temperature profile $\Theta(\eta)$ Vs η for various values of v_w and β with $Ec^*=0.24$ and $Ec=0.2$, $Pr=0.71$, $k_2=1.0$ and $k_1=0.2$

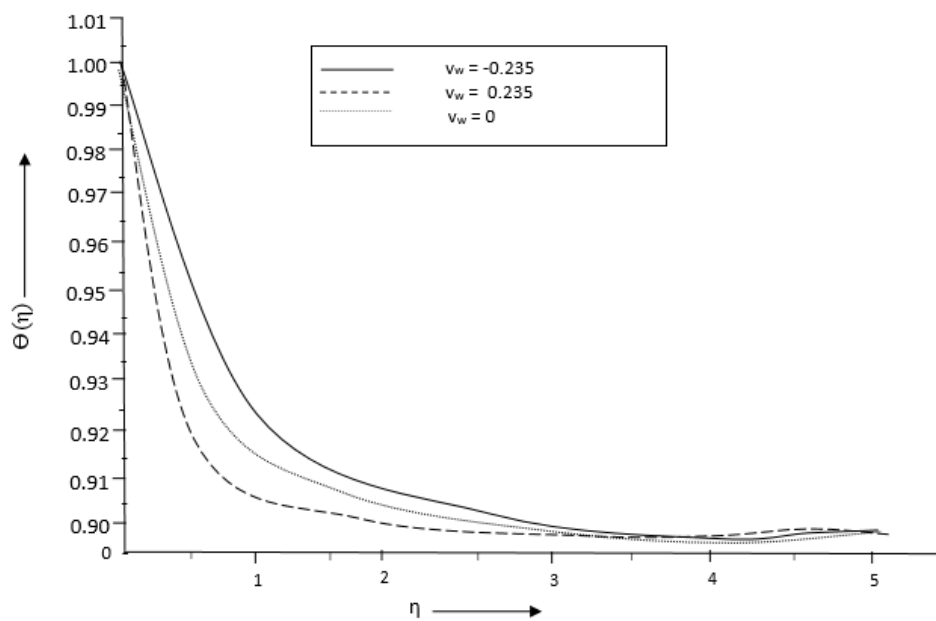


Fig. 2(d). The graph of temperature profile $\Theta(\eta)$ Vs η for different values of v_w with $Pr=0.71$, $\beta=-0.1$ with $Ec^*=0.24$ and $Ec=0.2$

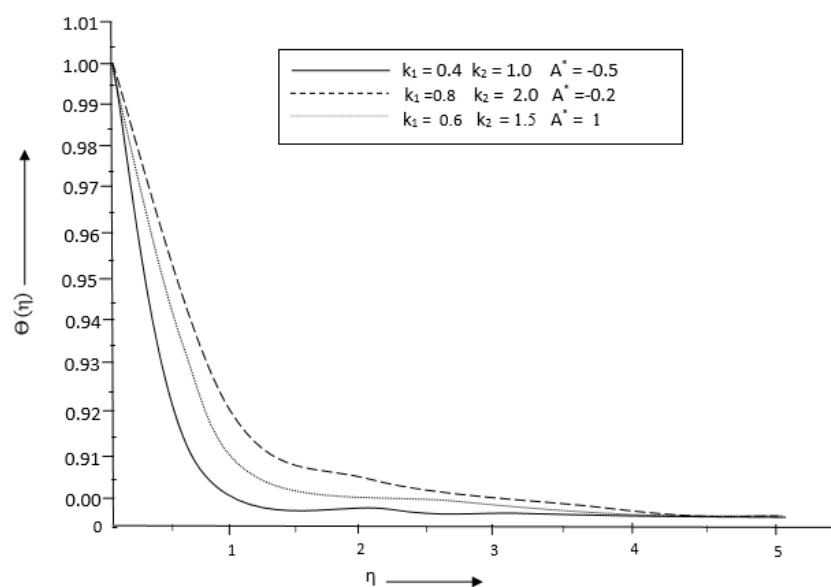


Fig. 2(e). The graph of temperature profile $\Theta(\eta)$ Vs η for various values of k_1, k_2 and A^* with $Pr=0.71, \beta=-0.1$

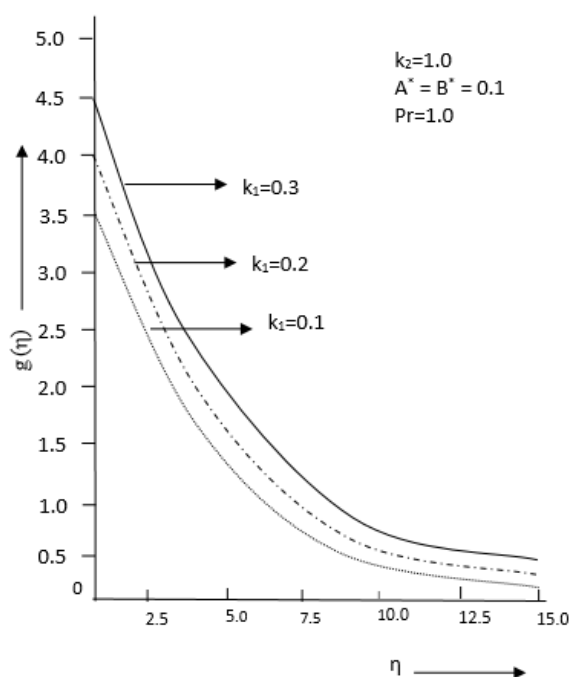


Fig. 3(a). The graph of temperature profile $g(\eta)$ Vs η for different values of $k_1=0.3, 0.2, 0.1$ with $k_2=1.0, A^*=B^*=0.1, Pr=1.0$ in PHF case

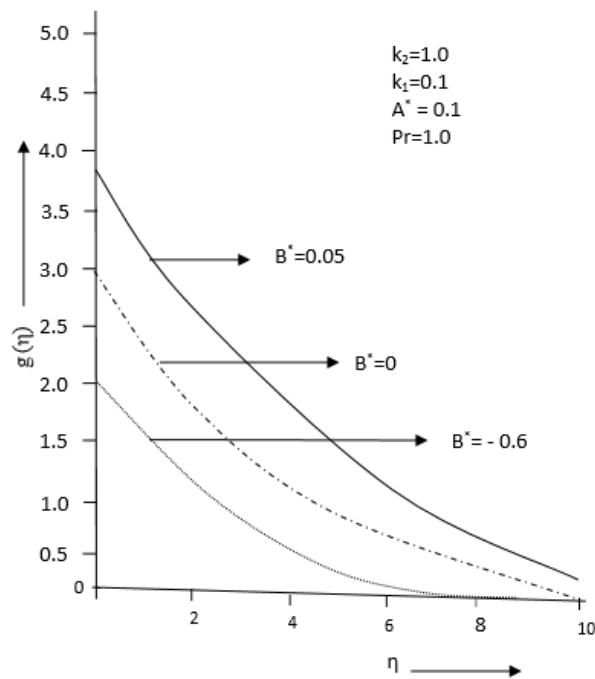


Fig. 3(b). The graph of temperature profile $g(\eta)$ Vs η for different values of temperature dependent heat source/sink parameter $B^*=0.05, 0, -0.6$, $k_2=1.0$, $k_1=0.1$, $A^*=0.1$, $Pr=1.0$ in PHF case

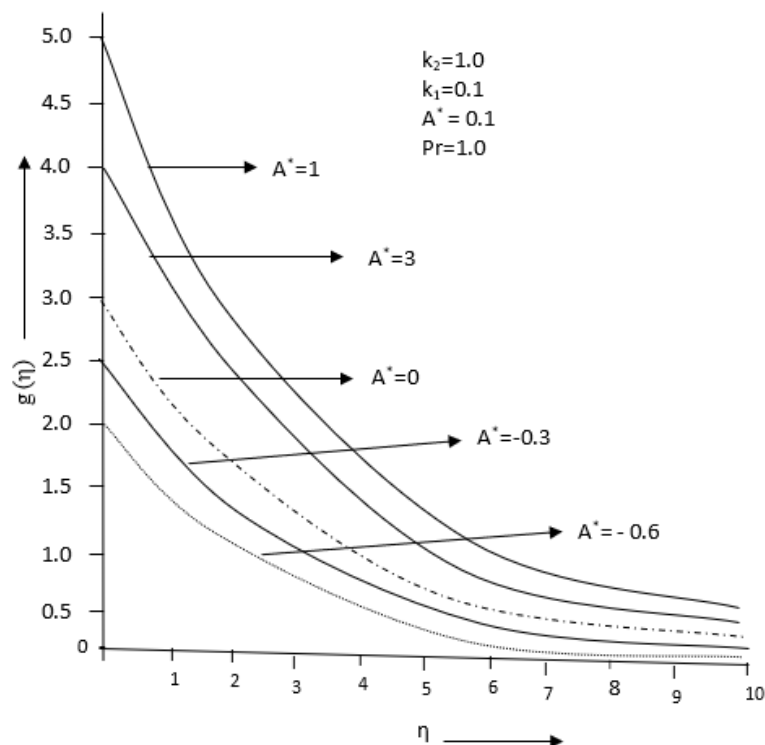


Fig. 3(c). The graph of $G(\eta)$ Vs η for different values of space dependent heat source/sink parameter $A^*=1, 3, 0, -0.3, -0.6$ with $k_1=0.1$, $Pr=1.0$, $k_2=1.0$ in PHF case

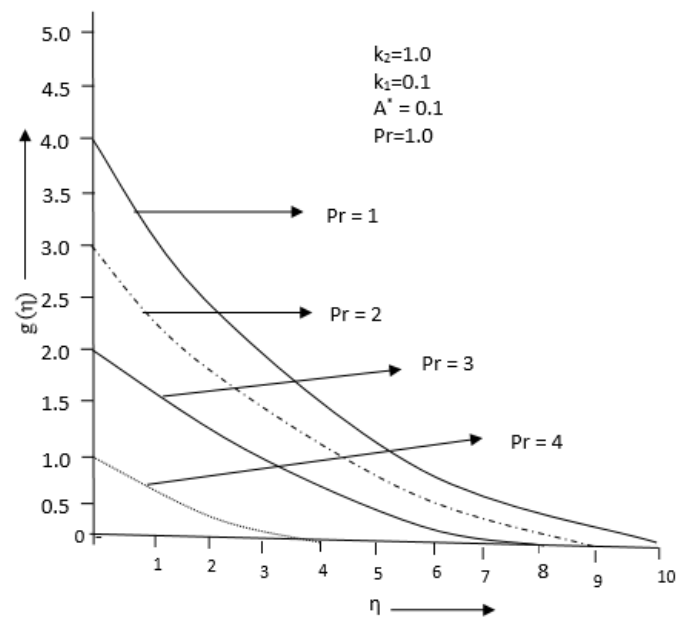


Fig. 3(d). The graph of $g(\eta)$ Vs η for different values of prandtl number parameter $Pr = 1, 2, 3, 4$ with $k_2=1.0$ $A^* = B^* = 0.1$ and $k_1=0.1$ in PHF case

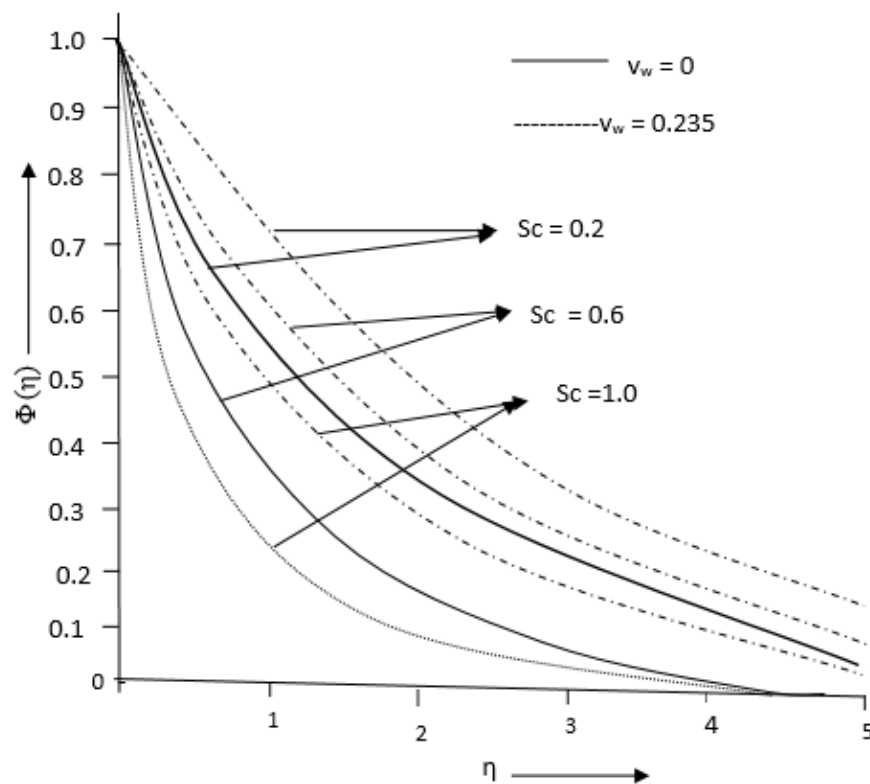


Fig. 4(a). The graph of the dimensionless concentration profiles $\Phi(\eta)$ Vs η for different values of Sc with $k_1=0.1$, $k_2=1.0$ $\beta=0$ in PST case

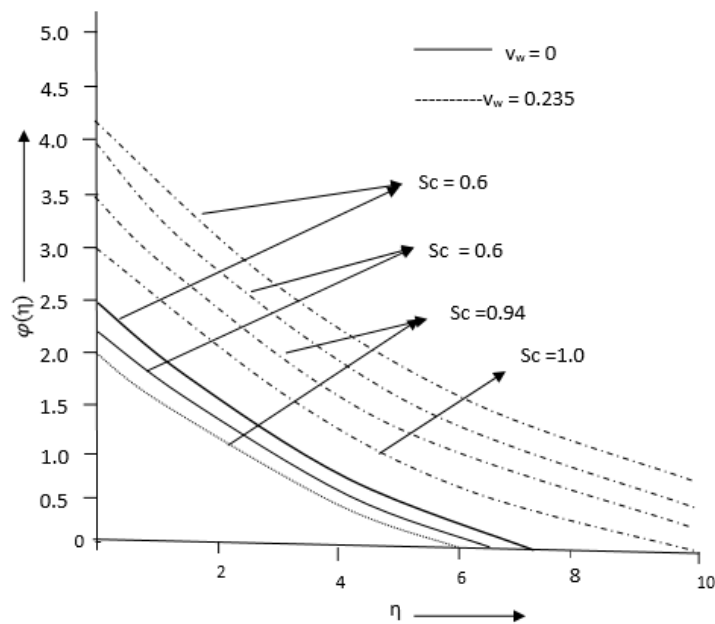


Fig. 4(b). The graph of dimensionless concentration profiles $\Phi(\eta)$ Vs η for various values of Sc with $k_1=0.1$, $k_2=1.0$ and prescribed wall mass flux for destructive first order reactions $\eta = 1$ in PHF case

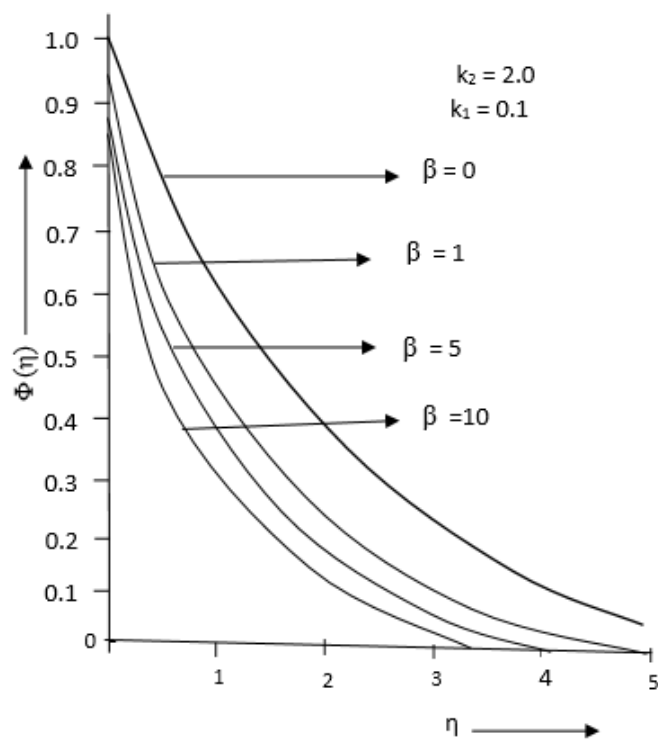


Fig. 4(c). The graph of the dimensionless concentration profiles $\Phi(\eta)$ Vs η for destructive first order reactions ($n = 1$) for $Sc = 1$ with the reaction rate β as parameter $k_1=0.1$, $k_2=2.0$ in PST case

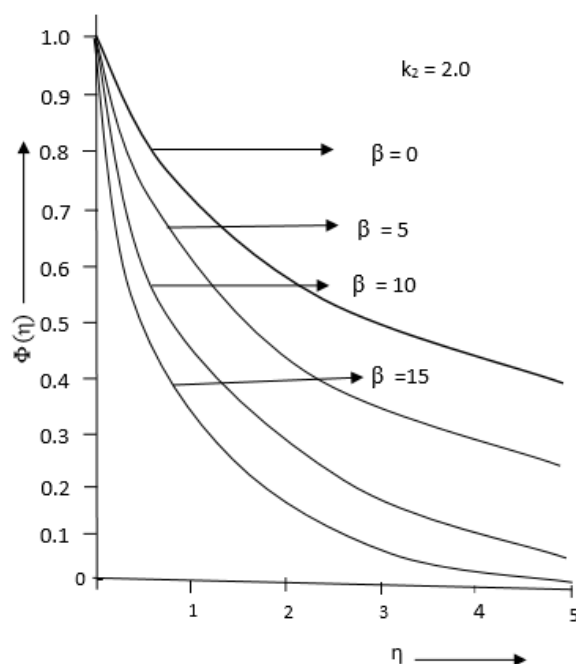


Fig. 4(d). The graph of concentration profiles $\Phi(\eta)$ Vs η for destructive first order reaction $n=1$, $Sc=0.1$ with the reaction rate β as parameter $k_1=0.1$.

8. References:

- [1] Sakiadis, B.C. (1961): "Boundary-layer behavior on continuous solid surfaces: I. Boundary-layer equations for two-dimensional and axisymmetric flow." *A.I.Ch.E. Journal*, Vol.7(1), pp.26–28, <https://doi.org/10.1002/aic.690070108>
- [2] Sakiadis, B. C. (1961): "Boundary-layer behavior on continuous solid surfaces: II. The boundary layer on a continuous flat surface." *A.I.Ch.E. Journal*, Vol. 7(2), pp 221–225. <https://doi.org/10.1002/aic.690070211>
- [3] Sakiadis, B. C. (1961): "Boundary-layer behavior on continuous solid surfaces: III. The boundary layer on a continuous cylindrical surface." *A.I.Ch.E. Journal*, Vol. 7(3), pp 467–472. <https://doi.org/10.1002/aic.690070325>
- [4] Erickson, L. E.; Fan, L. T.; Fox, V. G. (1966): "Heat and Mass Transfer on Moving Continuous Flat Plate with Suction or Injection." *Journal of Industrial & Engineering Chemistry Fundamentals*, 5(1), 19–25. <https://doi.org/10.1021/i160017a004>
- [5] F.K. Tsou; E.M. Sparrow; R.J. Goldstein (1967): "Flow and heat transfer in the boundary layer on a continuous moving surface." *international-journal-of-heat-and-mass-transfer*, Vol. 10(2), pp. 219–235. [https://doi.org/10.1016/0017-9310\(67\)90100-7](https://doi.org/10.1016/0017-9310(67)90100-7)
- [6] Siddappa, B.S.; Khapate.; Rivlin-Ericsen. (1976): "Fluid Flow past a Stretching Sheet." *Rev. Roum. Sci. Tech. Mech. (Appl.)* 2(1976). pp. 497–505.
- [7] Dutta, Binay K.; Gupta, Anadi S. (1987): "Cooling of a stretching sheet in a viscous flow". *Industrial & Engineering Chemistry Research*, Vol. 26(2), pp. 333–336. <https://doi.org/10.1021/ie00062a025>
- [8] K.R. Rajagopal, T.Y. Na, A.S. Gupta. (1984): "Flow of a viscoelastic fluid over a stretching sheet." *Rheol. Acta*. Vol.23. pp. 213–215.

- [9] K. Vajravelu; J. Nayfeh (1992): "Hydromagnetic convection at a cone and a wedge." *International Communication in Heat and Mass Transfer*, Vol. 19(5), pp. 701–710. [https://doi.org/10.1016/0735-1933\(92\)90052-j](https://doi.org/10.1016/0735-1933(92)90052-j)
- [10] Veena, P.H., Abel, S., Rajagopal, K. et al. (2006): "Heat transfer in a visco-elastic fluid past a stretching sheet with viscous dissipation and internal heat generation". *Z. angew. Math. Phys.* Vol. 57, pp. 447–463. <https://doi.org/10.1007/s00033-005-0016-7>
- [11] Siddappa, B., Abel, M.S. (1985): *Z. Angew. Math. Phys.*, Vol.36, pp. 890-892.
- [12] Siddappa, B., Abel, M.S. (1986): "Visco-elastic boundary layer flow past a stretching plate with suction and heat transfer". *Rheol Acta*. Vol.25, pp. 319–320. <https://doi.org/10.1007/BF01357958>
- [13] Chamkha Ali (1997): *Int. Comm. Heat and Mass Transfer*, Vol.24(6), pp. 815-825
- [14] Crepeau, J. C., and Clarksean, R. (1997): "Similarity Solutions of Natural Convection With Internal Heat Generation". *Journal of Heat Transfer*, pp 183-185.
- [15] Rafael Cortell Bataller. (2007): "Viscoelastic fluid flow and heat transfer over a stretching sheet under the effects of a non-uniform heat source, viscous dissipation and thermal radiation.", *International Journal of Heat and Mass Transfer*. Vol.50, pp.3152–3162. [doi:10.1016/j.ijheatmasstransfer.2007.01.003](https://doi.org/10.1016/j.ijheatmasstransfer.2007.01.003)
- [16] Dutta, B.K. (1989): "Heat Transfer from a stretching sheet with uniform suction and Blowing.", *Acta. Mech.*, Vol.,78, pp.255-262
- [17] Chen, C.K. and Char, M. (1972): Hand book of mathematical functions. *National Bureau of Standards/Amer Math.Soc.*,55, Providence, RI
- [18] Sonth R.M, Khan S.K., Abel M.S. and Prasad K.V. (2002): "Heat and mass transfer in a visco-elastic fluid over an accelerating surface with heat source/sink and viscous dissipation", *J.Heat Mass Transfer* , Vol.38, pp.213-220.
<https://doi.org/10.1007/s002310100271>
- [19] K.Rajagopala., P H Veena., V K Pravin.(2008): Diffusion of chemically reactive species of an electrically conducting visco elastic fluid immersed in a porous medium over a stretching sheet with PST and PHF cases, *Int. J. of applied mechanics and Engineering*, vol.13, No.2, pp.457-472.
- [20] Manjunatha Gudekote1, Hanumesh Vaidya2, Divya Baliga1, Rajashekhar Choudhari2,*, Kerehalli Vinayaka Prasad2, Viharika2. (2019): "The Effectsof Convective and Porous Conditions on Peristaltic Transport of Non-Newtonian Fluid through a Non-Uniform Channel with Wall Properties", *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, vol.63, Issue 1, pp.52-71.
- [21] Manjunatha Gudekote1,*, Rajashekhar Choudhari1.(2018): "Slip Effects on Peristaltic Transport of Casson Fluid in an Inclined Elastic Tube with Porous Walls", *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* ,vol.43, Issue 1, pp.67-80.
- [22] Divya Baliga1, Manjunatha Gudekote1,*, Rajashekhar Choudharil, Hanumesh Vaidya2, Kerehalli Vinayaka Prasad3.(2019): "Influence of Velocity and Thermal Slip on the Peristaltic Transport of a Herschel-Bulkley Fluid Through an Inclined Porous Tube", *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*. Vol.56, Issue 2, pp.195-210
- [23] Veena P.H. and Abel S. (1998): Visco-elastic fluid flow and heat transfer in a porous medium over a streatching sheet. – *Int. J. Non-Linear Mechanics*, vol.33, pp.531.